


# TRM10 C

Lower Price, High Reliability & User-friendly !

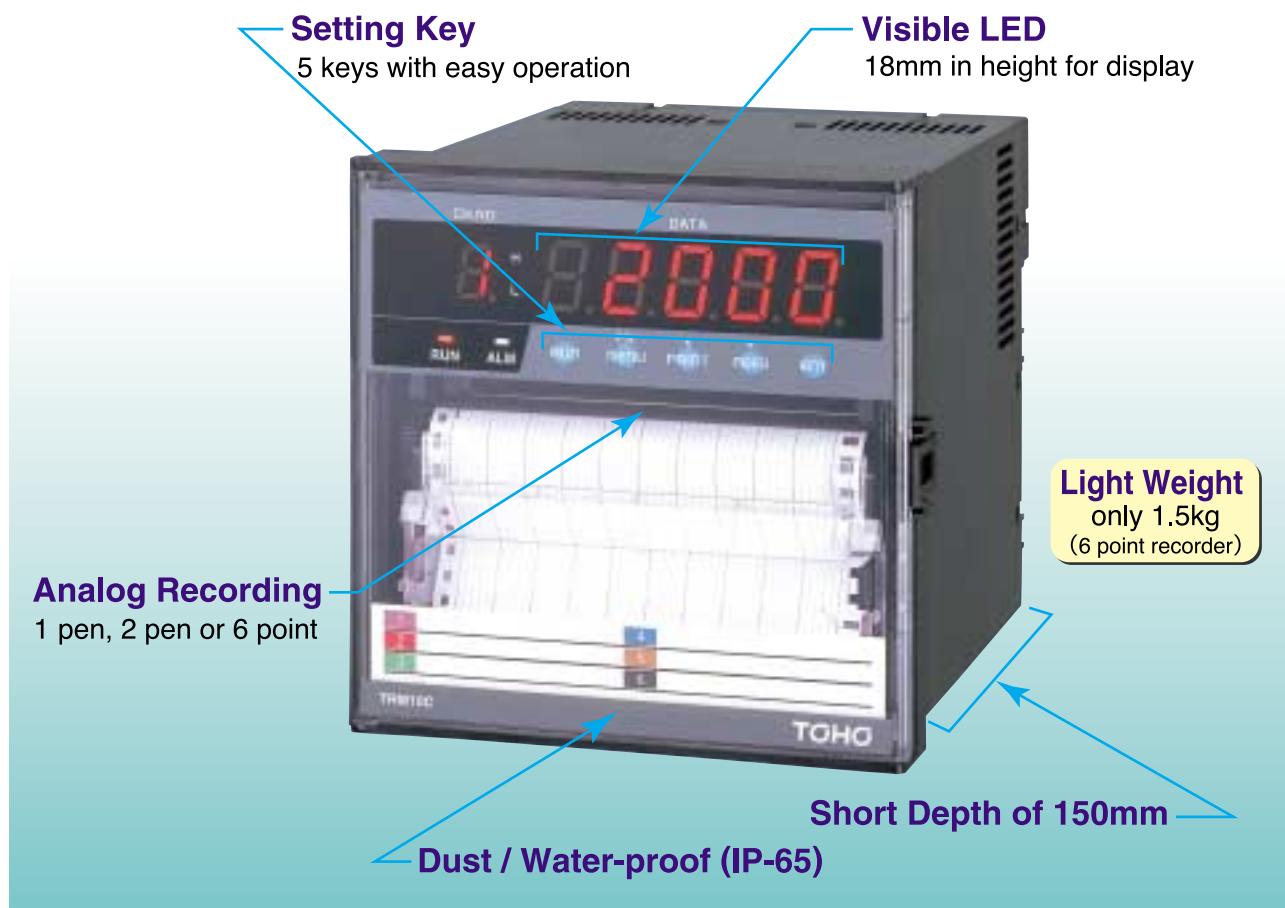

## ■ FEATURES


- Compact size  
144 (W) × 144 (H) × 150 (D) mm
- 1.5 kg (6 point recorder) of lightest weight on an industrial level
- Universal input and range
- RS-232C communication function provided for in standard specifications
- Option (detailed on the reverse of Ordering Information) & consumables available
- IP-65 conformed with Dust-proof & Water-proof
- UL, CSA & CE approvals

## ■ Consumables

1. Chart Paper (HZCGA0105EL001)
2. Ribbon Cartridge for 6 Point Recorder (WPSR188A000001A)
3. Ribbon Cartridge for 1 Pen/2 Pen Recorder (HPSR001H0002C)
4. Cartridge Pen (WPSR196A000001A; No.1)
5. Cartridge Pen (WPSR196A000002A; No.2)
6. Shunt Resistance (HMSU3081A01)


## ■ Dimensions

Unit: mm

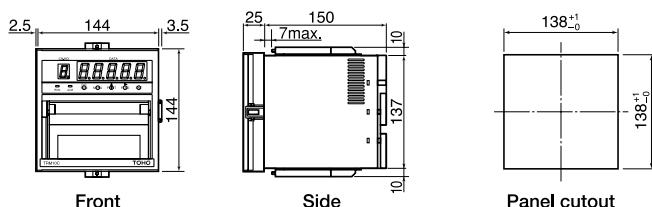

# TRM10C MINI RECORDER

## ■ Ordering Information

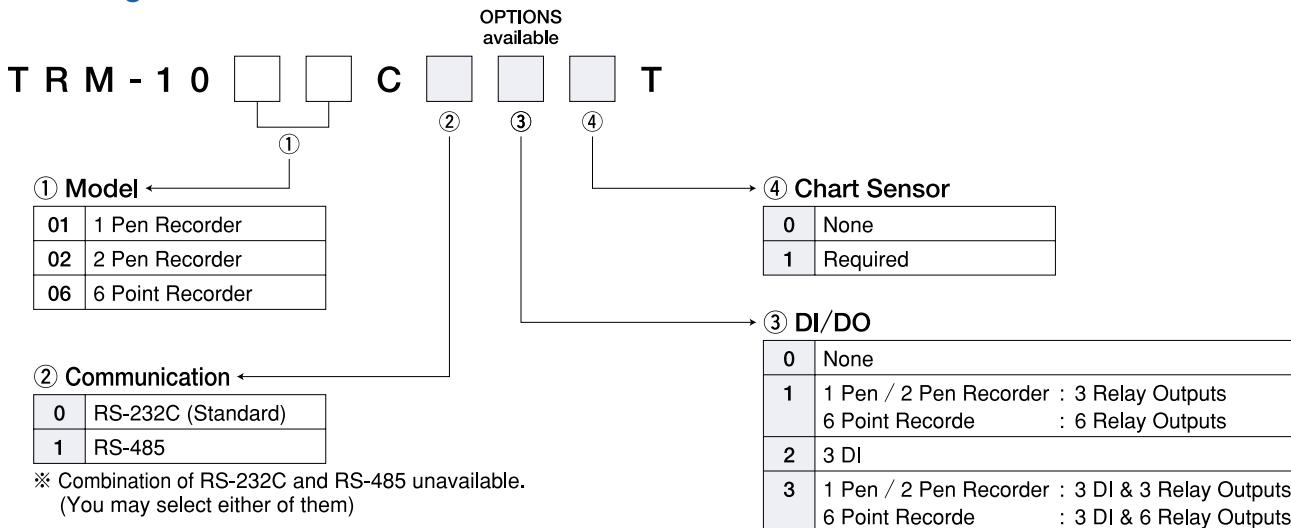

## ■ Specifications

TITLE		PEN RECORDER	MULTIPOINT RECORDER
Input	Number of Inputs	1 pen or 2 pen	6 point
	Measuring Cycle	125ms	10s/6ch, max
	Input Type	Direct voltage: $\pm 10mV$ , $0\text{--}20mV$ , $0\text{--}50mV$ , $\pm 200mV$ , $\pm 1V$ , $\pm 10V$ , $0\text{--}5V$ Direct current: $4\text{--}20mA$ ( $250\Omega$ shunt resistance required to install externally) Thermocouple : K, T, J, E, B, S, R, C, N, PR40-20, PLII, L, Au-Fe, U R.T.D. : Pt100, JPt100	
	R.T.D.		
Performance	Accuracy	$\pm 0.3\%$ $\pm 3$ digit max. for Digital indicator/printing	
	Noise Reduction	NMRR (Normal mode): 60dB min. (50/60Hz $\pm 0.1Hz$ ) CMRR (Common mode): 140dB min. (50/60Hz $\pm 0.1Hz$ )	
	Isolation Resistance	Each terminal/ground: 500V DC, $20M\Omega$ min.	
	Voltage-proof	Power input terminal/ground: 1.5kV AC, 1 minute Input terminal/ground: 0.5kV AC, 1 minute	
	Vibration-proof	10~60Hz, $1m/s^2$ max.	
	Shock-proof	$2m/s^2$ max.	
Alarm	Number of Relay Outputs	3 outputs (Form A contacts: Built-in option)	6 outputs (Form A contacts: Built-in option)
	Capacity	250V AC 3A max. loaded, 30V DC 3A max. loaded	
Communication	Interface	RS-232C (Standard), RS-485 (Option)	
Power Supply	Rated Power Voltage	100~240V AC (50/60Hz)	
	Power Consumption	30VA max. (100V AC)	25VA max. (100V AC)
Structure	Mounting/Housing	Panel mounting / Front panel: Dust-proof, Water-proof (IP-65)	
	Dimensions	144(W) $\times$ 144(H) $\times$ 150(D) mm	
	Gross Weight	2.0~2.5kg max.	1.5kg max.
Operation Condition	Allowable Conditions	Temperature: 0~50°C, Humidity: 20~80%RH	
Recording/Printing	Recording	Disposable felt pen	Wire dot 6 color ribbon
	Printing	Wire dot 1 color ribbon	
	95% Step Response Time	1.0s max.	
	Dot Print Cycle		10.0s/6ch max.
	Chart Paper	Length: 16m, Width: 114mm, Width folded: 40mm	
	Chart Speed	User-selective from 41 speeds in range: 5~12000mm/hr.	User-selective from 34 speeds in range: 0~1500mm/hr.
	Printing Color	Red, Green	Purple, Red, Green, Blue, Brown, Black

※ Specifications are subject to change without notice.

## ! CAUTION

Please install this device after careful reading of the instruction manual.



**TOHO ELECTRONICS INC.**

Head office: 1-13-21, Tanashioda, Sagamihara Kanagawa 229-1124 Japan.

Phone: +81-42-777-3311 Fax: +81-42-777-3751

E-Mail: info@toho-inc.co.jp

Web site: http://www.toho-inc.co.jp